HOW TO BUILD A SINGLE CHAMBER URINE- DIVERTING TOILET Section 2

HOW TO BUILD A SINGLE CHAMBER URINE- DIVERTING TOILET

HOW TO USE THE FLIPCHART

- The flipchart is designed to stimulate interaction with community members. Encourage the audience to ask questions and make comments.
- 2. The questions in the text will help you to guide the discussion.

 Possible answers to these questions are included so that you can supplement the comments from the audience.
- 3 The flipchart is more effective when used with a small audience (15-25 persons). If you have more than 25 persons in a community, have two or more sessions.
- 4 Select a comfortable place and make sure everybody can see the illustrations very well.
- 5 Hold the flipchart straight. Talk loudly.
- 6 Demonstrate as much as possible
- 7 Have the audience summarise the major stages of the day's discussions

ILLUSTRATION 1

Let us learn about how to build single chamber urine-diverting toilets in our households/communities


The components of a single chamber urine diverting toilet

NOTE TO THE COMMUNITY OFFICER

- Discuss the components of the single chamber urine diverting toilet
- 2. Discuss the steps in making the various components of toilet

ANSWERS:

- 1. Parts of the urine diverting toilet:
 - The concrete base slab
 - The brick chamber (vault) that houses the faeces
 - The concrete latrine slab which fits on top of the chamber
 - The toilet house (superstructure) which provides privacy and security
- 2. Steps in making the various components
 - Make a concrete base slab on a level ground to form the base of the toilet
 - Cast a concrete latrine slab off-site
 - Cast holes in the latrine slab for the squat plate and the vent pipe
 - Build a chamber preferably with fired/burnt bricks and mortar to house the bucket (faeces container)
 - Make a chamber access slab to fit at the rear of the chamber
 - Make a superstructure with relevant and affordable materials to offer privacy
 - Make a hole in the roof for a ventilation pipe to pass through

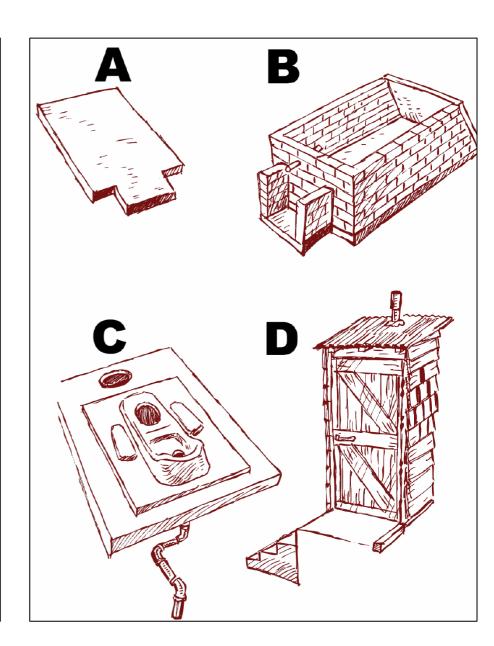


Building the concrete base slab of a single chamber urine diverting toilet

NOTE TO THE COMMUNITY OFFICER

- 1. Explain the various steps in making the base slab
- 2. Demonstrate the various steps in making the base slab

ANSWERS:

- 1. Making the concrete base slab
 - Make the slab of concrete (5 parts river sand to 1 cement or 3 parts river sand, 2 parts small stones and 1 part cement))
 - Cast within a mould of bricks with dimension 1.35m long x 0.9m wide x 75mm deep
 - Place steel reinforcing wires in the concrete and leave to cure for at least two days
 - Lay the base slap on level ground to form the base of the toilet

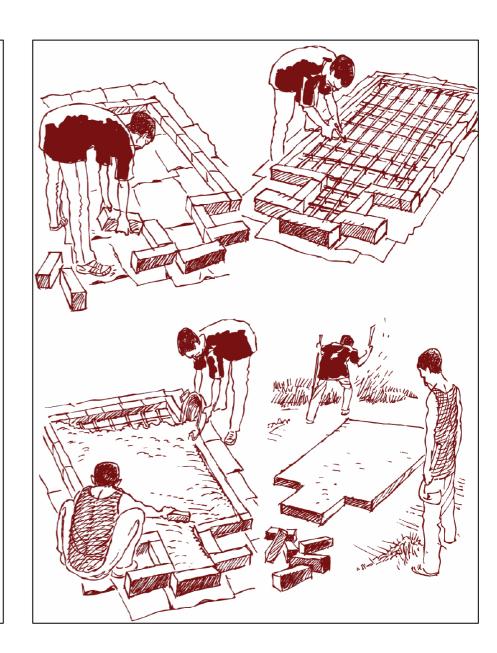

Building the latrine slab of a single chamber urine diverting toilet


NOTE TO THE COMMUNITY OFFICER

- 1. Explain the various steps in making the latrine slab
- 2. Demonstrate the various steps in making the latrine slab in a single vault urine diverting toilet

ANSWERS:

3. Making the latrine slab

- Cast off-site using the same method as for the base slab
- Make dimension of slab 1.2m long and 0.9m wide and 40mm deep
- Cast holes in the slab for both the squat plate and vent pipe

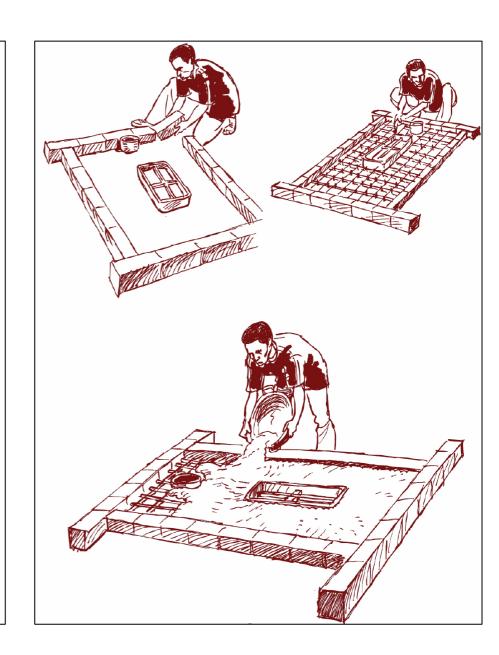

How to build the chamber that houses the faeces


NOTE TO THE COMMUNITY OFFICER

- Explain the various steps in making the chamber and fitting the concrete toilet slab on top of the chamber
- 2. Demonstrate the various steps in making the chamber in a single vault urine diverting toilet

ANSWERS:

Making the chamber

- Build chamber with fired (burnt) bricks and mortar to the required height on the base slab
- 2. Build chamber about 40cm high if a 20litre bucket is used
- 3. Make the chamber access slab and
- 4. Place the concrete toilet slab on top of the chamber bonded with a cement mortar

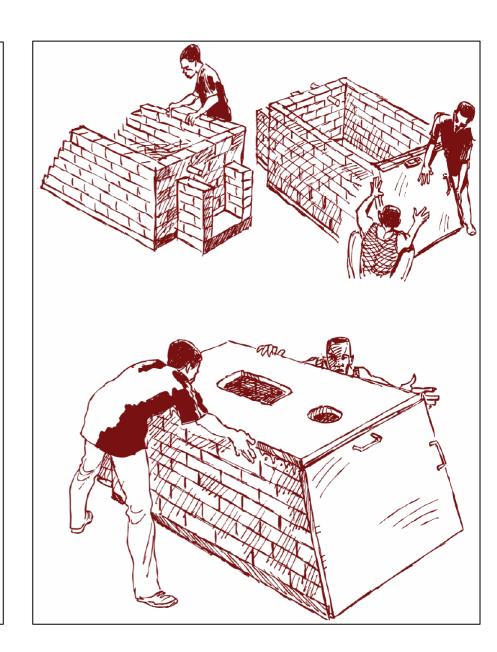

Fixing the squat plate and the urine diverter


NOTE TO THE COMMUNITY OFFICER

- 1. Explain how the squat plate and the urine diverter are mounted
- 2. Demonstrate how the squat plate and the urine diverter are mounted

ANSWERS:

Fixing the squat plate and the urine diverter

- 1. A squat plate is mounted on the holes cast in the concrete latrine slab
 - A plastic elbow is fixed to the urine diverting outlet of the squat plate through which a plastic pipe directs the urine into a storage container

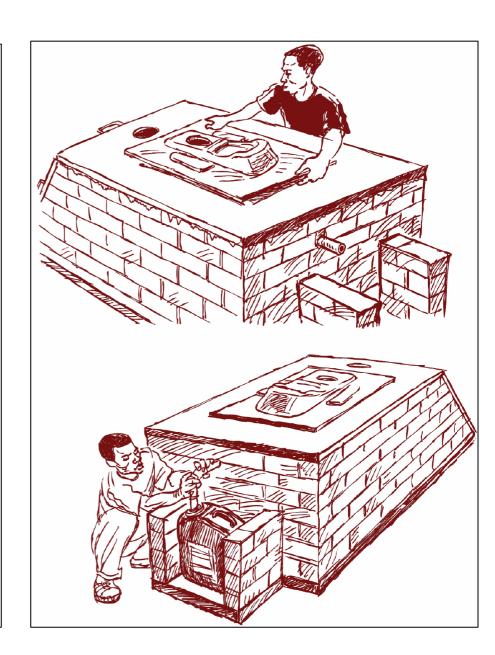

How to place the vent pipe within the single chamber urine diverting toilet


NOTE TO THE COMMUNITY OFFICER

- 1. Explain the various steps in placing the vent pipe in the structure
- 2. Demonstrate the various steps in placing the vent pipe in the structure

ANSWERS:

Placing the vent pipe

- 1. Place the vent pipe through the vent hole cast in the concrete latrine slab
- Make a hole in the roof for the ventilation pipe to pass through

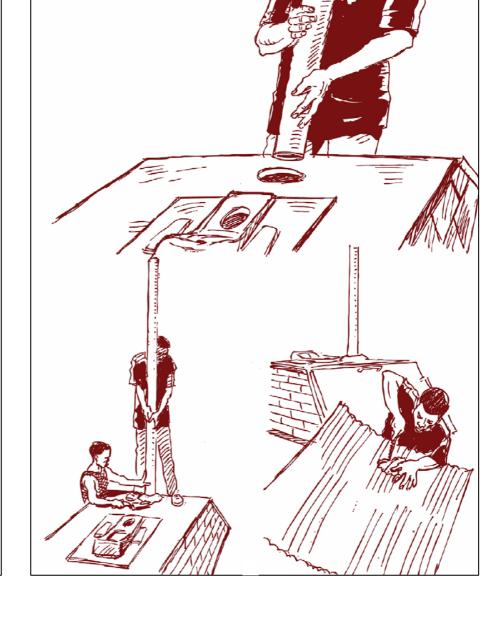

How to build the superstructure

NOTE TO THE COMMUNITY OFFICER

- 1. Explain the various steps in making the superstructure
- 2. Demonstrate the various steps in making the superstructure

ANSWERS:

Making the superstructure

- Can be made from timber, bricks, metal sheeting, grass or any material that offers privacy
 - Use suitable roofing materials such as galvanized corrugated iron, thatch or precast concrete
 - Make a hole in the roof for the ventilation pipe to pass through
 - Create openings through the structure to provide ventilation and light

