



SFD Lite Report

Beanibazar Municipality Bangladesh

This SFD Lite Report was prepared by
CWIS-FSM Support Cell, DPHE

Date of production/ last update: 09/04/2025

1 The SFD Graphic

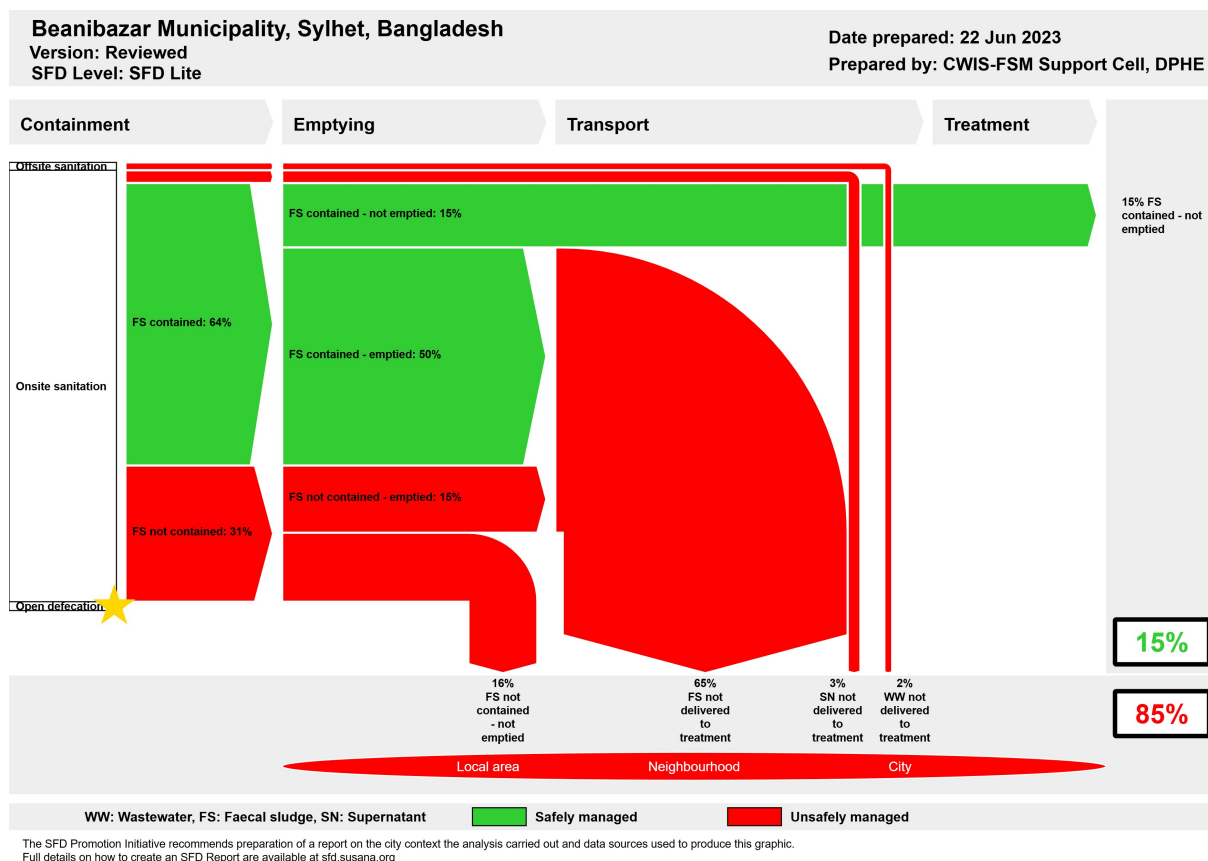


Figure 1: SFD Graphic for Beanibazar Municipality.

2 SFD Lite information

Produced by:

Dr. Abdullah Al-Muyeed, Chief Operating Officer, CWIS-FSM Support Cell, Department of Public Health Engineering (DPHE); Md. Shafiqul Hassan, Co-Chair, CWIS-FSM Support Cell, DPHE; Md. Tawhidur Rahaman, Technical Expert, CWIS-FSM Support Cell, DPHE; Parimal Kumar Dev, CEO, Municipal Association of Bangladesh; Md. Tahmidul Islam, Technical Lead, WaterAid Bangladesh and Md Zarif Oeishik, Associate Officer, WaterAid Bangladesh.

Collaborating partners:

WaterAid Bangladesh, Municipal Association of Bangladesh (MAB), Onushandhani Creeds Ltd, and Beanibazar Municipality played vital roles in collecting and sharing data and producing this SFD graphic and SFD lite report.

Date of production: 09/04/2025

3 General city information

Geography: Beanibazar Municipality is a municipality in the Beanibazar Sub-District (Upazila), which is situated in Sylhet District (Zila) under Sylhet Division. The geographical coordinates of Beanibazar are 24°49'30" N and 92°09'45" E.¹ Beanibazar Municipality is situated in the Beanibazar District. It is bordered on the north by Kanaighat and Zakiganj Upazilas, on the south by Barlekha, on the east by Assam (India), and on the west by Golapganj Upazila (Figure 2).²

Categorisation: The Local Government (Municipality) Act of 2009 classifies Municipalities of Bangladesh into A, B, and C classes based on their annual income. Class A municipalities have the highest annual income. Beanibazar Municipality was established in 30th April, 2001. It is a 'Category A' Municipality. Beanibazar Municipality is divided into 9 wards (Figure 3).³

Demography: According to the population census in 2011 by the Bangladesh Bureau of Statistics (BBS), the population of Beanibazar Municipality was 42,030. The urban population growth in Beanibazar is 1.32% per year. Considering 10% floating population, such as farmers and traders coming to the city every day, the present (2023) population is estimated to be around 54,112 (Table 1). The household survey results show that majority of the occupation is business (34%), followed by private service (21%), self-employment (11%) and agriculture (8%).⁴

Climate: Sylhet has a typical Bangladeshi tropical monsoon climate (Köppen Am) bordering on a humid subtropical climate (Cwa) at higher elevations.⁵ The maximum mean temperature observed is around 27°C - 30°C between March-August, with the minimum mean temperature of 11°C – 15°C in December-January. The annual average rainfall is about 2,081 mm, according to BMD (2003-2019).

Hydrology: Main rivers are Surma, Kushiya and Sonai. Kalauchi and Sada canals are notable.⁶

Housing: The household survey included the different types of residential structures in the Municipality which are pucca, semi-pucca, tin-shed and kacha/jhupri houses.

- Pucca: houses single or multi-storied built with substantial materials such as brick, cement, and concrete,
- Semi pucca: houses, either the roof or the walls, but not both, are not made of pucca materials,
- Tin-shed: roof and walls of the house made of corrugated iron sheets,
- Kacha/Jhupri: roof and walls made of temporary materials like bamboo, paper boards, polyethylene sheets, and the floor made of mud etc.⁷

Water status: The main sources of water for drinking and for household activities include plain tube well and tube well with pump.⁸

¹ <http://www.maplandia.com/bangladesh/chittagong-div/sylhet-zl/mathiura/streets/beani-bazar-added-by-ebadur/beani-bazar-added-by-ebadur-google-earth.html>

² https://en.banglapedia.org/index.php?title=Beanibazar_Upazila

³ KII at Beanibazar Municipality

⁴ KII and field visit during Baseline survey 2023

⁵ <https://en.wikipedia.org/wiki/Sylhets>

⁶ https://en.banglapedia.org/index.php?title=Beanibazar_Upazila

⁷ KII and field visit during Baseline survey 2023

⁸ KII and field visit during Baseline survey 2023

Table 1: City profile (Source: Beanibazar Municipality Office).

Population parameters	Value
Estimated population, 2023	54,112
Households, 2023	11,440
Area, sq.km	12.39
Total roads, km	105
Total drains, km	55

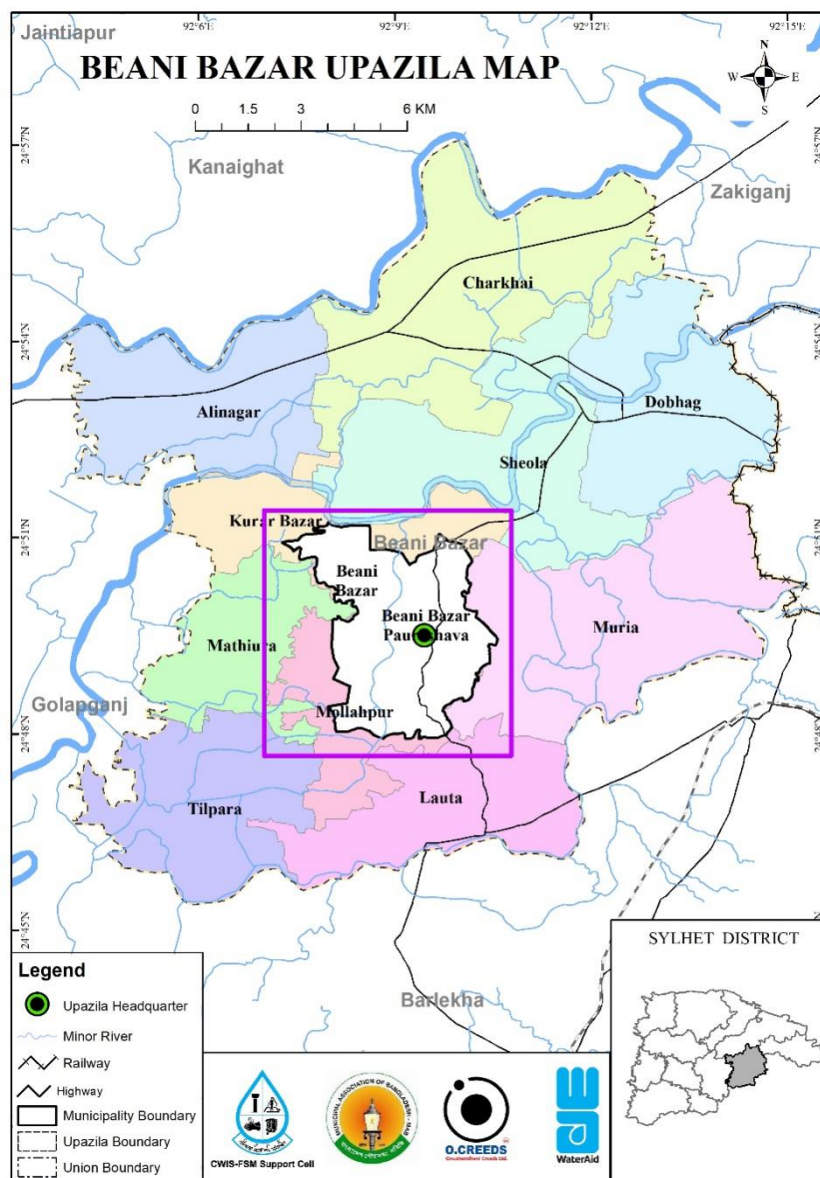


Figure 2: Beanibazar Municipality Location Map.

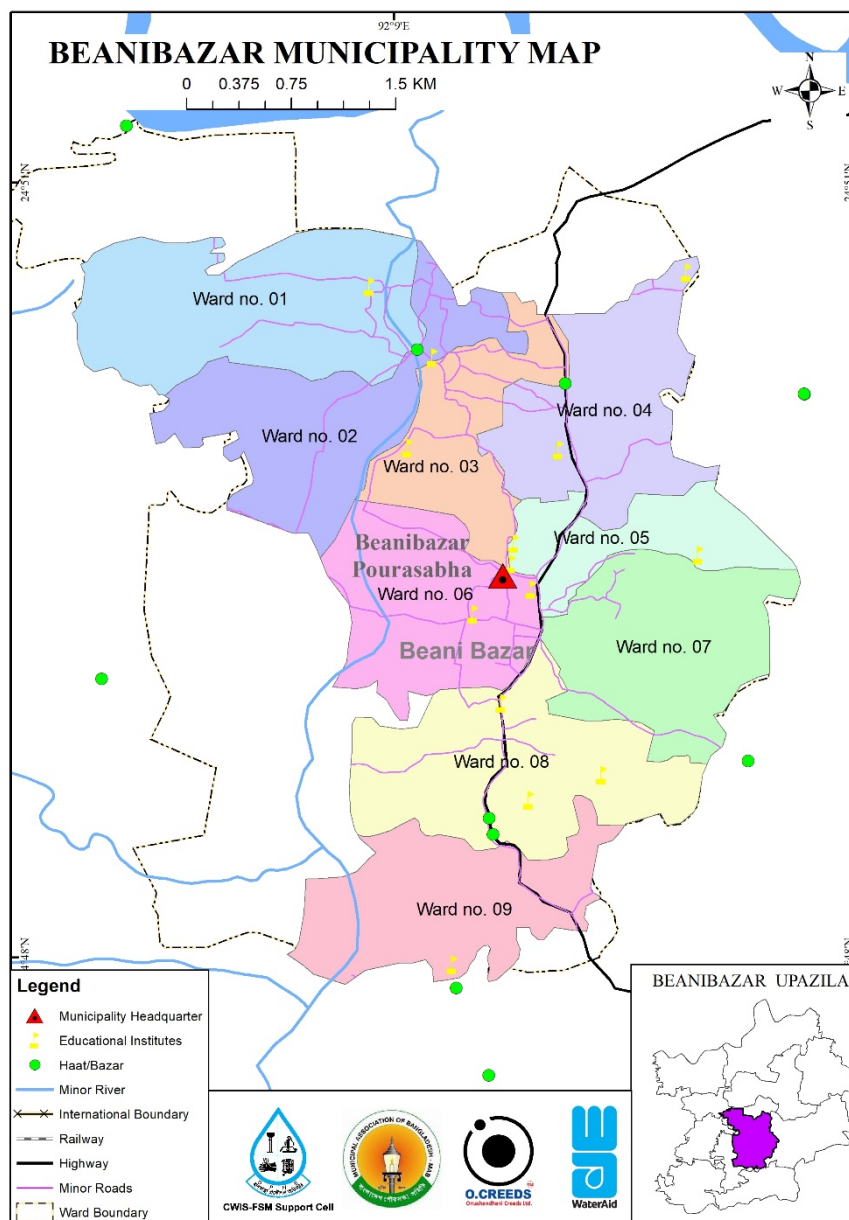


Figure 3: Beanibazar Municipality Ward Boundary Map.

4 Service outcomes

The city does not have a dedicated sewerage system and most sanitation systems available in the town are classified as onsite systems (98.2%). The main types of toilet facilities are septic tanks connected to a soak pit, to an open drain, to a water body or to open ground, lined tanks or lined pits, with no outlet or overflow and unlined pits.

Table 2 summarises the sanitation systems in use, as well as estimates of the population connected to each system. For the onsite sanitation systems, it shows the proportions of each from which faecal sludge is then emptied, transported to treatment and treated. For the offsite systems (toilet discharging to open drain), it shows the proportion of wastewater delivered to treatment and treated.

Beanibazar Municipality, Sylhet, Bangladesh, 22 Jun 2023. SFD Level: SFD Lite Population: 54112 Proportion of tanks: septic tanks: 82%, fully lined tanks: 0%, lined, open bottom tanks: 100%								
Containment								
System type	Population	WW transport	WW treatment	FS emptying	FS transport	FS treatment	SN transport	SN treatment
	Pop	W4c	W5c	F3	F4	F5	S4e	S5e
System label and description	Proportion of population using this type of system (p)	Proportion of wastewater in open sewer or storm drain system, which is delivered to treatment plants	Proportion of wastewater delivered to treatment plants, which is treated	Proportion of this type of system from which faecal sludge is emptied	Proportion of faecal sludge emptied, which is delivered to treatment plants	Proportion of faecal sludge delivered to treatment plants, which is treated	Proportion of supernatant in open drain or storm sewer system, which is delivered to treatment plants	Proportion of supernatant in open drain or storm sewer system that is delivered to treatment plants, which is treated
T1A1C6 Toilet discharges directly to open drain or storm sewer	0.3	0.0	0.0					
T1A1C7 Toilet discharges directly to water body	1.0							
T1A1C8 Toilet discharges directly to open ground	0.5							
T1A2C5 Septic tank connected to soak pit	11.8			65.0	0.0	0.0		
T1A2C6 Septic tank connected to open drain or storm sewer	16.1			55.0	0.0	0.0	0.0	0.0
T1A2C7 Septic tank connected to open water body	12.1			55.0	0.0	0.0		
T1A2C8 Septic tank connected to open ground	5.7			55.0	0.0	0.0		
T1A4C10 Lined tank with impermeable walls and open bottom, no outlet or overflow	1.5			50.0	0.0	0.0		
T1A5C10 Lined pit with semi-permeable walls and open bottom, no outlet or overflow	50.7			84.0	0.0	0.0		
T1A6C10 Unlined pit, no outlet or overflow	0.3			0.0	0.0	0.0		

Table 2: SFD Matrix for Beanibazar Municipality.

The figures shown in Table 2 and elaborated in the following section are derived from information obtained through household surveys (HH), interviews with key informants (KII), and discussions in focus groups (FGD) (as shown in Figure 4).

Overview on technologies and methods used for different sanitation systems through the sanitation service chain is as follows:

4.1 Offsite Systems

The city does not have a dedicated sewerage system. However, during field observation and HH survey, it was found that there is a certain area where toilets are directly connected to open drains or storm sewer. Similarly, a portion of septic tanks is directly connected to open drains or storm sewer. Therefore, the T1A1C6 is considered as 0.3% of the total population of the city. Similarly, T1A2C6 is considered as 16.1% of the total population to generate the SFD graphic. In the absence of a sewerage system, the faecal sludge and the supernatant in T1A2C6 are directly discharged into open water body or the environment untreated.

4.2 On-site Sanitation Systems



Figure 4: Household survey and consultations at Beanibazar Municipality. (Source: *Field Survey, 2023/ O.CREEDS_WaterAid Bangladesh*).

Containment: Almost all the households (98.2%) in the city have their latrine which is connected to single pits, twin pits, septic tanks, or discharged directly into the environment (e.g., open-drain or storm sewer). From the household survey, it was found that 45.7% of the city population uses septic tanks as the containment system, 50.7% of the toilets have single pit systems, 1.5% of people use double pits and 0.3% use dug holes as the containment system. About 1.8% do not have any type of containment and discharge directly to the environment (KII, FGDs, HH survey, 2023).

According to the type of connectivity and features of containment technologies, the discharging points of the toilets are categorised as: 11.8% of the population uses septic tanks connected to soak pits (T1A2C5), 16.1% of the population uses septic tanks connected to open drain (T1A2C6), 12.1% of the population uses septic tanks connected to water bodies (T1A2C7), 5.7% of the population uses septic tanks connected to open ground (T1A2C8), 1.5% of the population uses lined tanks with impermeable walls and open bottom, no outlet or overflow (T1A4C10), 50.7% of the population relies on lined pits with semi-permeable walls and open bottom with no outlet or overflow (T1A5C10) and 0.3% of the population uses unlined pit, no outlet (T1A6C10) (KII, FGDs, HH survey, 2023). Thus, at the containment stage, the city's excreta of only 64% of the population are contained. Figure 6 shows pictures of these technologies in operation.

Groundwater Pollution: The depth to groundwater in the city ranges from 4-17 metres.⁹ The most common drinking water production technology is a tube-well with a hand pump or a motor. Among them, 61% of the households use their own tube-well fitted with electric motor and 38% use their own hand pump tube-well, and 1% use community tube-well. Tube wells of different sizes and depths are generally used to pump water from the subsurface confined aquifers.

During the household visit and FGDs, it was found that around 98% of sanitation facilities are located within 10 metres from the groundwater source. Besides, due to the geographical situation, sanitation facilities are not located uphill of the groundwater sources. According to a survey report on 'Hydrogeological screening, slug test and geophysical logging on observation well units', conducted by the Department of Public Health Engineering (DPHE) on March 2017, drinking water is collected from the confined aquifer (25m – 200m) through pumps. Hence, considering all these factors, it is considered that there is not any significant risk of groundwater contamination in the city. Therefore, a low risk of groundwater contamination is considered in the city.

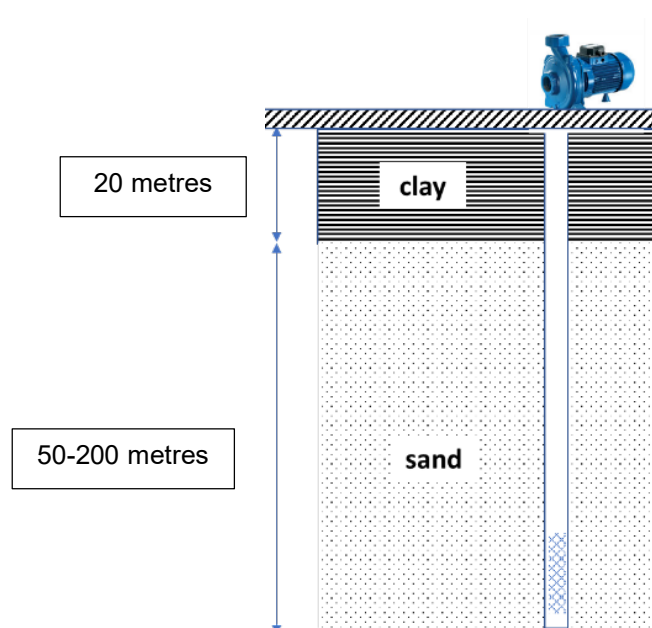


Figure 5: Soil profile in Beanibazar Upazila and location of tubewell screen.

⁹ Survey Report on 'Hydrogeological screening, slug test and geophysical logging on observation well units', conducted by the Department of Public Health Engineering (DPHE)



Figure 6: Containment technologies and their connections in Beanibazar Municipality (Source: Field Survey 2023/ O.CREEDS_WaterAid Bangladesh).

Emptying: Around 71% of households relying on septic tanks get service from private sweepers for emptying of the septic tank. It was observed from the survey that 30% of septic tanks have been constructed in the last 5 years. According to the survey from 2023, the frequency of emptying of septic tanks or covered pits varies from 1 to 7 years depending upon the size, uses, etc.

However, about 65% of the septic tanks, connected to the soak pit are emptied within 6 years. About 55% of the septic tanks connected to open drains, open ground or water bodies were emptied within last 10 years. Almost 84% of single pit latrines are emptied within 1-5 years. Besides the above information, it was also revealed during the discussion in FGDs and household visits that the demand for desludging septic tanks would increase shortly. Desludging of the septic tanks and pit is mostly (99%) done by private sweepers. In few households, desludging is done by municipal sweepers and private agencies. Around 88% of this withdrawal is done manually using a bucket and rope. 2% use electric pumps and some use (10%) manual pump – these reflect the use of the higher level of technologies by some of the workers. The municipality has no Vacutug in operation¹⁰.

Transportation: The sludge withdrawn from the septic tanks and latrine pits by the cleaners is disposed of in various places. Based on the survey from 2023, it was observed that almost 78% of the respondents who use any kind of containment system informed that faecal sludge (sludge from the septic tank or covered pit latrines) is disposed of in open ground covered with soil away from the house. Besides, 22% of the faecal sludge is disposed of in the open environment like a drain, open ground, and water bodies.

Treatment/Disposal: Presently, there are no treatment facilities in the town.

4.3 Open Defecation

From HH surveys, KIIs and FGDs, it was found that 100% of citizens use some kind of toilet in the municipality. Thus, from the sanitation point of view, the town is considered an open defecation-free town.

¹⁰ KII at Municipality.

4.4 SFD Graphic

The outcome of the SFD graphic shows that only fifteen percent (15%) of the excreta flow is classified as safely managed, and the remaining eighty five percent (85%) is classified as unsafely managed (Figure 7).

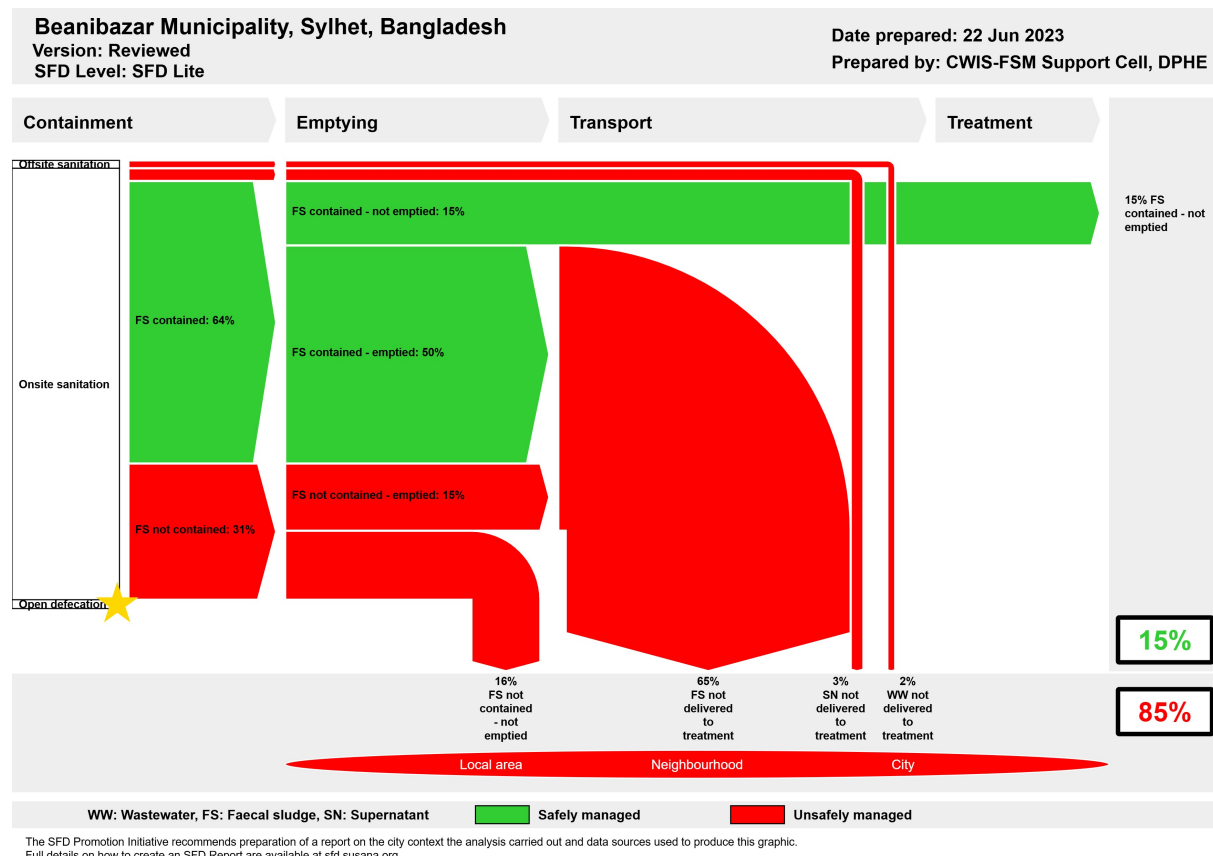


Figure 7: SFD Graphic for Beanibazar Municipality.

The unsafely managed excreta originate from wastewater not delivered to treatment (2%), Faecal Sludge (FS) both contained and not contained - not delivered to treatment (65%), FS not contained - not emptied (16%) and 3% of supernatant not delivered to treatment.

The safely managed excreta originate from FS contained - not emptied (15%). However, the safely managed FS generated by this 15% of the population is temporary, since FS from onsite sanitation systems will require emptying services in the short and medium term as they fill up. This proportion of safely managed FS will soon become unsafely managed once the containments start filling up.

5 Data and assumptions

The baseline survey conducted in May-June 2023 contains detailed data on different stages of the sanitation value chain. The SFD matrix is generated data collected during sample household surveys, along with informal interviews, open-ended consultations, key informant interviews and focus group discussions with the municipality officials, educational institutions, health complex and general public. Finally, data from all these sources was triangulated to produce the SFD matrix, the SFD graphic and the SFD lite report.

The last census was carried out about 12 years ago. So, the actual population, household, and sanitation data are not updated yet. Most of the households with septic tanks do not know the actual type, size, and design desludging periods. Also, a large number of pit users are unaware of the emptying events and frequency of their pit emptying. Due to all this data gaps, some assumptions have been made to produce the SFD graphic. These assumptions were shared with key informants at the municipality and accepted by them.

Following assumptions were made for developing the SFD graphic for Beanibazar Municipality:

- ✓ The proportion of FS in septic tanks, fully lined tanks, and lined, open bottom tanks are considered 82%, 0%, and 100% respectively as per the guidance given in the Frequently Asked Questions (FAQs) in the Sustainable Sanitation Alliance (SuSanA) website.
- ✓ According to the population census in 2011 by the Bangladesh Bureau of Statistics (BBS), the population of Beanibazar Municipality was 42,030. The urban population growth in Beanibazar is 1.32% per year. Considering 10% floating population, such as farmers and traders coming to the city every day, the present (2023) population is estimated to be around 54,112 (Table 1).
- ✓ There are around 1.5% of twin pit latrines in the containment system. So, it is assumed that all these twin pit containment technologies are defined as a lined tank with impermeable walls and open bottom (system T1A4C10, 1.5%). Based on the household survey, variable F3 for system T1A4C10 is set to 50.0%.
- ✓ There are around 50.7% of single pit latrines in the containment systems. So, it is assumed that all these single pit containment technologies are defined as lined pits with semi-permeable walls and open bottom, no outlet or overflow, where there is no 'significant risk' of groundwater pollution (system T1A5C10, 50.7%). Most of the single pit latrines are found to be emptied within 1-2 years. Based on the household survey, variable F3 for system T1A5C10 was set to 84%.
- ✓ About 11.8% of septic tanks are connected to soak pits (system T1A2C5). They are well-constructed as per the field visit observation. The risk of groundwater contamination was deemed low, therefore that option was selected in the SFD Matrix.
- ✓ Around 65% of HHs using septic tank with a soak pit have a desludging frequency of 2-5 years. Based on the household survey, variable F3 for system T1A2C5 is set to 65%.
- ✓ There are 33.9% of septic tanks connected to the open drain, water bodies and open ground, 55% of which are emptied within 2-5 years. Based on the household survey, variable F3 for systems T1A2C6, T1A2C7 and T1A2C8 is set to 55%.
- ✓ Wastewater in T1A1C6 and supernatant in T1A2C6 are directly discharged into the river or the environment untreated. Therefore, variables W4c, W5c, S4e and S5e were set to 0%.
- ✓ Since there are no wastewater or faecal sludge treatment facilities in the town and all the collected FS is disposed untreated into the environment, variables F4 and F5 for all systems are considered to be 0%.

6 References

Reports, literature and website

- Population and Housing Census, Bangladesh Bureau of Statistics (BBS), 2011.
- Bangladesh Meteorological Department, BMD (2003-2019)
- Survey Report on 'Hydrogeological screening, slug test and geophysical logging on observation well units', conducted by the Department of Public Health Engineering (DPHE)
- https://en.banglapedia.org/index.php?title=Beanibazar_Upazila
- <http://www.maplandia.com/bangladesh/chittagong-div/sylhet-zl/mathiura/streets/beani-bazar-added-by-ebadur/beani-bazar-added-by-ebadur-google-earth.html>
- <https://en.wikipedia.org/wiki/Sylhets>

Key Informant Interviews (KIIs) (May-June 2023)

- KII with Sub-Assistant Engineer, Beanibazar Municipality
- KII with DPHE Official, Beanibazar Municipality.

Facilitators: Md. Fazlul Haque (Project Manager), Md. Jawadul Kabir Showda (Enumerator), O. CREEDS Ltd.



Figure 8: KIIs at Beanibazar Municipality (Source: *Field study 2023/O.CREEDS_WaterAid Bangladesh*).

Focus Group Discussions (FGDs) (May-June 2023)

- Educational Institution
- Public Place
- Municipality
- Health Complex



Figure 9: Focus Group Discussions at Beanibazar Municipality. (Source: Field survey 2023/ O.CREEDS_WaterAid Bangladesh).

Additional information

- To accelerate actions toward CWIS approach, WaterAid launched the project titled 'National and Bilateral WASH Advocacy (NaBWASHA)' funded by Bill and Melinda Gates Foundation (BMGF). WaterAid along with Municipal Association of Bangladesh (MAB) and Citywide Inclusive Sanitation-Faecal Sludge Management (CWIS-FSM) Support Cell of Department of Public Health Engineering (DPHE) commissioned the study 'Assess the flow of waste and develop Excreta Flow Diagram (SFD) and Waste Flow Diagram (WFD) for fifty municipalities of Bangladesh' to analyse the current state of faecal sludge management (FSM) and solid waste management (SWM) practices.
- In-depth information and data was collected for the towns which included project documents, master plans and baseline reports from the municipalities and national levels, statistical data like population and household income expenditure, GIS data and other geospatial data and satellite images, and open street maps (OSM). The Field Survey of the project was conducted from 29th May to 1st June, 2023. The field survey includes household surveys, key informant interviews, focus group discussions. A Kobo server has been established to monitor FSM and SWM databases under the project. The results of the study are shared with the municipal authority and are considered as a basis for preparing investment projects by the government and development partners, and sustainable plans for operating and maintaining the systems by the municipal authorities.
- We would like to thank Farukul Haque, Mayor, Beanibazar Municipality; Md. Ashrafur Alam, Sub-Assistant Engineer; Md. Sujan Mia, Sub-Assistant Engineer, DPHE, Beanibazar Municipality for providing all the required primary and secondary data and cooperating for Key Informant Interviews (KIIs) & Focused Group Discussions (FGDs). This report would not have been possible to produce without the constant support of Farukul Haque, Mayor, Beanibazar Municipality, who helped in conducting sample surveys and FGDs in the field.
- We also acknowledge the support of the Centre for Science and Environment, India for the promotion of SFD in Bangladesh.

Beanibazar Municipality, Bangladesh, 2025

Produced by:

Dr. Abdullah Al-Muyeed, Chief Operating Officer,
CWIS-FSM Support Cell, Department of Public
Health Engineering (DPHE), Bangladesh

Md. Shafiqul Hassan, Co-Chair, CWIS-FSM
Support Cell, DPHE

Parimal Kumar Dev, CEO, Municipal Association
of Bangladesh

Md. Tawhidur Rahaman, Technical Expert,
CWIS-FSM Support Cell, Department of Public
Health Engineering (DPHE), Bangladesh

Md. Tahmidul Islam, Technical Lead, WaterAid
Bangladesh

Md. Zarif Oeishik, Associate Officer- Technical,
WaterAid Bangladesh

© Copyright

All SFD Promotion Initiative materials are freely
available following the open-source concept for
capacity development and non-profit use, so long
as proper acknowledgement of the source is
made when used. Users should always give
credit in citations to the original author, source
and copyright holder.

This SFD lite report is available from:
www.sfd.susana.org

SFD Promotion Initiative

